



Working hard to keep workers safe

1900 Enterprise Parkway Suite H  
Twinsburg OH, 44087  
Email: [Sales@rtisafety.com](mailto:Sales@rtisafety.com)  
Phone: (800) 254-2990 Local: (330) 405-5444  
Fax: (330) 487-5521

## CLASS III NYLON HARNESS


- Full-body Nylon Harness
- Comfortable and lightweight
- Seamless integration for emergency egress, assisted rescue, and self-rescue after a fall
- Goes on in seconds with multiple adjusters
- Pass Thru Adjusters on the legs
- Chest and dorsal anchor points
- Side position rings - Option

### AVAILABLE CUSTOMIZATION OPTIONS

- Sizes:
  - Small (up to 6'2")
  - Tall (6'2"-6'6")
- Multiple padding options:
  - Legs
  - Chest
  - Shoulder
  - Full Padding
- Available in Nylon or Kevlar
- Attachment Options:
  - Tri-Link
  - Quarter-Turn Carabiner – NFPA 2012 and ANSI Z 359.1 Certified

### COMPONENTS & DATA

- Nylon Webbing (Standard)
  - 1 3/4" Nylon
  - 15,000# Tensile Strength
- Kevlar (Option)
  - Fire Rated at 860°F
  - 10,000 lbs. Tensile Strength
- Standards for Safety:
  - NFPA 1983 – Life Safety Rope and Equipment for Emergency Services, 2022 Edition

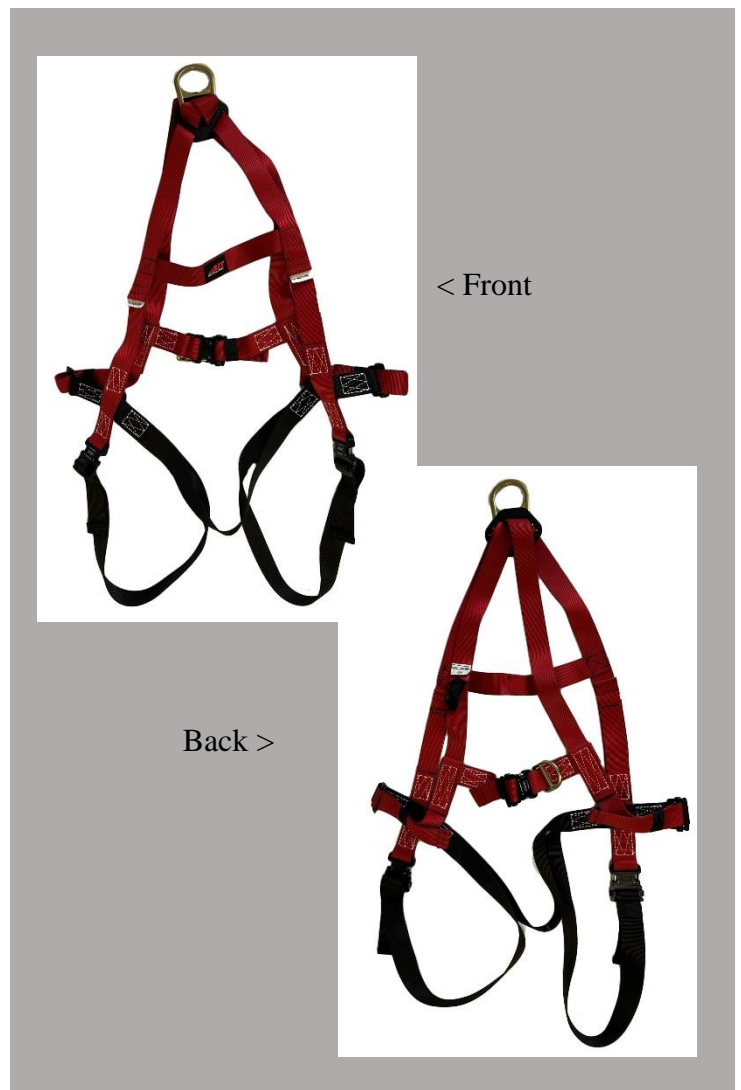

\*\*For a complete list of certifications, or for further questions, please visit our website [www.ritsafety.com](http://www.ritsafety.com)\*\*